



ACCESSORY
PRODUCTS


NEW PRODUCT
UNIQUE on the market

SOPRATAACK

ROOFS



ULTRA-FAST CURING ADHESIVE FOR MEMBRANES

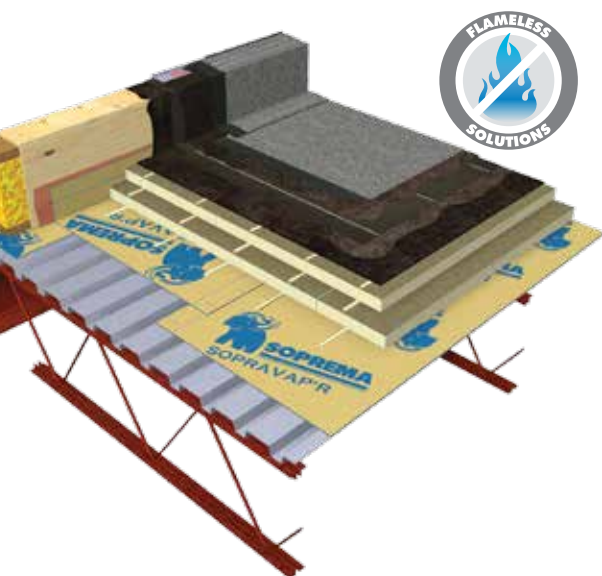

SOPRATAACK is an odour-free, two-component polyurethane adhesive with very low VOC content. It is used to adhere SBS polymer modified bitumen membranes on low-slope surfaces.

Perfect product for projects that restrict solvent use and odours, such as in hospitals and schools.

- Fully cured in 24 hours
- Odour free
- Excellent adhesion

SURFACE PREPARATION

The surface must be clean, dry, and free of oil, grease, dirt, or debris.

COMPLEMENTARY PRODUCTS

SOPRATAACK FLASHING

Use to adhere SBS polymer modified bitumen membranes on flashings and slope surfaces > 3 % (3/8 in per ft).

SOPRALENE STICK HR and SOPRAFLASH STICK

Covered with SOPRALENE STICK HR GR membrane can be used on upstands.

COLPLY

Perfect membrane for cold-adhered systems.



SOPRATAACK	
SOLID CONTENT	> 99,5 %
CONTAINER	14,7 L (3,9 US gal)
COVERAGE RATE	17 m ² (180 ft ²)

INSTALLATION INSTRUCTIONS

1



Remove the lid and then remove the metal container, which contains Part A, from the plastic insert.

2



Remove the plastic insert and pour Part A (catalyst) into Part B (resin).

3



Using a low-speed mixer (200 to 400 rpm), thoroughly mix the entire contents of the container for 4 to 5 minutes to obtain a homogeneous consistency.

Note : Coat the surface with adhesive at a rate of 0.9 L/m² (2.25 US gal/100 ft²) with a thickness of 36 mil. Coverage rate may vary depending on the substrate condition.

4



SOPRATAACK adhesive is applied using a 4.8 mm (3/16 in) neoprene notched squeegee.

If you have any questions about this product or its installation, please contact your SOPREMA representative.

