



WATERPROOFING

PRE-APPLIED / BONDED

MIDDLE EAST

DUO SELVEDGE
 TECHNOLOGY

COLPHENE[®] BSW PROTECT'R 3.0

PRE-APPLIED, BONDED SYSTEM PROTECTION SHEET MEMBRANE
 DESIGNED FOR BLIND SIDE WATERPROOFING

TECHNICAL DATA SHEET 170714SME3E

DESCRIPTION

COLPHENE BSW PROTECT'R 3.0 is a fully bonded protection sheet system membrane designed to be used as a second layer and protection sheet in horizontal blind-side waterproofing applications. The membrane is composed of formulated select blend of high performance elastomeric Styrene-Butadiene-Styrene (SBS) modified bitumen combined with Ultra-High Strength (UHS) reinforcement and coated with specially engineered Silicone Dioxide.

USER APPLICATIONS

- Protects COLPHENE BSW H 3.5 from damage due to possible labour traffic or rebar installation.

INSTALLATION GUIDELINES

- As part of an integrated Value-Engineering system, COLPHENE BSW PROTECT'R 3.0 is installed layered and overlapped with other COLPHENE BSW system membranes.
- In horizontal application, adhere the COLPHENE BSW PROTECT'R 3.0 onto COLPHENE BSW H 3.5 staggered and aligned properly to avoid excessive layering.
- Follow the DUO-SELVEDGE guidelines to install side-laps. Side-laps with the adjacent ply should be, minimum, 100 mm while end-laps to be minimum 150 mm.
- Heat-weld all side-lap edges with a propane torch and use a round nose trowel to create a perfect seal with the bead of bitumen. End-laps shall be staggered by at least 300 mm. For more information on the system installation follow the project's Method Statement or consult your local SOPREMA representative.
- Storage of other trade material on top of the membrane should be avoided to achieve the optimum performance of the system.

DUO-SELVEDGE TECHNOLOGY

COLPHENE BSW PROTECT'R 3.0 is distinguished by SOPREMA's unique, patented technology; DUO-SELVEDGE which is designed to ensure a safe and high performance installation at the critical locations of side-laps. A percentage of the surface of DUO-SELVEDGE is sealed with self-adhesive. The rest of the selvedge surface is then safely sealed with propane torch or hot air. For best application use SOPREMA's **SOPRAMATIC CART** which is equipped with a hot air blower designed to weld the DUO SELVEDGE of SOPREMA membranes.

COLPHENE BSW SYSTEM COMPONENTS

- COLPHENE BSW V 3.0 (Vertical Application)
- COLPHENE BSW H 3.5 (Horizontal Application)
- COLPHENE BSW PROTECT'R 3.0 (Horizontal Protection)
- PROCTDRAIN or SOPRADRAIN 10 G (Vertical Support)
- SOPRAJOINT RIH / SOPRAJOINT WS (CJ Treatment)

DETAILING & PILE HEAD

- COLPHENE SP LAP (Construction Joint & Corner detailing)
- ALSAN CAP-C (Pile Head Re-Profiling)
- ALSAN FLASHING (Detailing & Pile Head Treatment)
- ALSAN CAP-E (Pile Head Encapsulation)
- FLASHING REINFORCEMENT (Detailing & Pile Head Treatment)

SUSTAINABILITY, HEALTH & ENVIRONMENT

All our activities & growth target sustainable development to minimize the impact on the environment. COLPHENE BSW system membranes do not contain any substances that might be detrimental to health or to the environment and complies with generally accepted health standards. Please refer to the product's Safety Data Sheet for more information.

QUALITY CONTROL

COLPHENE BSW system membranes are manufactured in ISO-9001 certified SOPREMA factories which are audited by Third-Party organizations such as Underwriters Laboratories (UL) and FM Global. The system membranes are manufactured to meet SOPREMA's Quality Management Manual.

Remarkable Bond-Strength to Structural Concrete

Part of a Value Engineering System in
 Sub-Structure Waterproofing

Eliminates the Need for Protective Screed on
 Horizontal Substrates

Resistant to Aggressive Chemicals
 (Chloride, Sulphate and pH level between 2 & 10)

Homogeneous, Fully Sealed DUO-SLEVEDGE
 Overlaps.


USE WITH COLPHENE BSW PRODUCTS

5" ROLLER

CODE: 25075

20" ROLLER

CODE: 25073

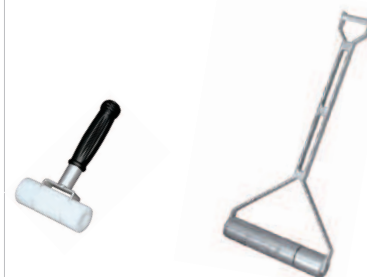

For ideal application results, use SOPREMA's Rollers & Tools to install COLPHENE BSW membranes and seal overlaps.



WATERPROOFING

PRE-APPLIED / BONDED

MIDDLE EAST

DUO SELVEDGE
 TECHNOLOGY

COLPHENE[®] BSW PROTECT'R 3.0

PRE-APPLIED, BONDED SYSTEM PROTECTION SHEET MEMBRANE
 DESIGNED FOR BLIND SIDE WATERPROOFING

TECHNICAL DATA SHEET 170714SME3E

PACKAGING

SPECIFICATIONS	STANDARDS	COLPHENE BSW PROTECT'R 3.0
Colour	-	Black
Thickness (Gross)	ASTM D5147	3.0 mm
Roll Dimensions	-	10 x 1 m
Roll Weight	-	36 Kg
Rolls per Pallet	-	30
Underface	-	Silicone Release Film
Surface	-	Specially Engineered Silicone Dioxide Sand
Side-Lap Width	-	10 cm

(All Values are Nominal)

TECHNICAL PROPERTIES

PROPERTIES	STANDARDS	COLPHENE BSW PROTECT'R 3.0
Tensile Strength, MD/XD	ASTM D5147	15/13.5 kN/m
Elongation @ Break, MD/XD	ASTM D5147	60 % / 65 %
Tear Strength, MD/XD	ASTM D5147	575 N / 500 N
Puncture Resistance, MD/XD	ASTM D5147	1100 N
Water Vapour Permeance	ASTM E96 method B	< 2.1 ng / Pa.s ^m ² < 0.04 perms
Water Absorption	ASTM D570 @ 24 hrs	< 0.5 %
Adhesion to Poured Structural Concrete, 22 °C	ASTM D903 modified	4200 N/m
Resistance to Hydrostatic Head	ASTM D5385	> 110 m
Lateral Water Migration	ASTM D5385 modified	> 110 m
Static Coefficient of Friction on Concrete	ASTM D1894	0.8
Low Temperature Flexibility	ASTM D5147	Unaffected @ -30 °C (-22 °F)

(All Values are Nominal)

All published properties are nominal and considered by SOPREMA to be true and accurate. These nominal values are subject to variation not exceeding 15% based on statistical data obtained internally and verified by internationally accredited independent laboratories.

STORAGE & HANDLING

Rolls must be stored in a shaded area in an upright position with the selvedge side on top.

SOPREMA may modify the composition and/or utilization of its products without prior notice.



SOPREMA MIDDLE EAST:
 DAFZA, P.O.Box 371013,
 Dubai, United Arab Emirates
 TEL: +971 4 609 1661
 Fax: +971 4 609 1662
 www.soprema.ae
 info@soprema.ae

SOPREMA NORTH AMERICA HQ:
 1688 Jean-Berchmans-Michaud,
 Drummondville,
 Quebec, J2C 8E9, Canada
 TEL: 1 800 567-1492,
 www.soprema.ca

SOPREMA GROUP HQ:
 SUBSIDIARY OF SOPREMA S.A.S.,
 14 Rue de Saint Nazaire
 CS 60121, F-67025, STRASBOURG
 CEDEX, France,
 Tel: +33 (0)3 88 79 84 00,
 Fax: +33 (0)3 88 79 84 01
 www.soprema.com