



CRAK OF 1 TO 13 mm (1/16 TO 1/2"):
ALSAN ACTIF SEALANT (i)

CRAKS OF 13 TO 25 mm (1/2 TO 1")

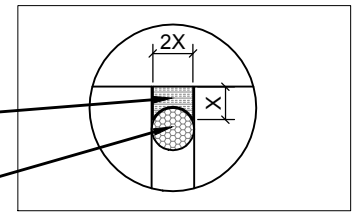

COPYRIGHT 2017 SOPREMA

		1688, J-B Michaud Drummondville, QC J2C 8E9 WWW.SOPREMA.CA	
		TITLE: SYSTEM 1 ALSAN FLOORBASE EP	
PROJECT:		DRAWING NUMBER:	
SCALE:	N.T.S.	DATE:	SEPT. 2017
			ALFL01

NOTES:
 (i) Contersink to obtain a minimum opening of 6 mm (1/4") and full with alsan actif sealant.
 (ii) Create the joint so the alsan actif sealant has a width / depth ratio of 2: 1 measured over the backer rod. Do not exceed 13 mm (1/2") deep.