




INSULATION

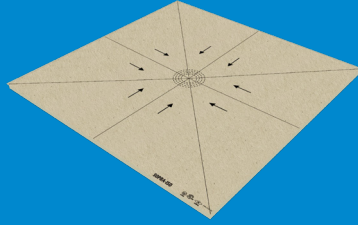

# SOPRA-ISO PLUS HINGED SUMP ROOFS

## SLOPE INSULATION

PROPERTIES	
Surface	Polymer-coated glass fibre facers
Underface	Polymer-coated glass fibre facers
Applications	Adhesive Adhered with hot bitumen Mechanically fastened
Width	2.44 m (8 ft)
Length	2.44 m (8 ft)
Net Area	5.95 m <sup>2</sup> (64 ft <sup>2</sup> )
Service Temperature	-73 to 122 °C (-100 to 250 °F)

Considered by industry professionals as an essential component for insulated conventional roofs, the 8 ft × 8 ft hinged sump helps ensure the primary condition for any good drainage: making sure the drain is at the actual lowest point. Easy to install in one step, it contributes to positive drainage around drains. Whether the decking is flat or has an integrated structural slope, the hinged sump is essential for all your projects and helps ensure the longevity of the roof.

- Reduces installation time
- Ensures that water flows efficiently towards the drain
- Adapted to drains of different diameters

PRODUCT	CODE	SLOPE	THICKNESS (MIN.)	THICKNESS (MAX.)	UNITS PER SKID
SOPRA-ISO PLUS HINGED SUMP	41884	2%	12.7 mm (0.5 in)	38.1 mm (1.5 in)	7
	41886	2%	25.4 mm (1 in)	50.8 mm (2 in)	5
	41885	2%	38.1 mm (1.5 in)	63.5 mm (2.5 in)	4
	41887	2%	50.8 mm (2 in)	76.2 mm (3 in)	3
	41746	4%	0 mm (0 in)	50.8 mm (2 in)	5
	41888	4%	12.7 mm (0.5 in)	63.5 mm (2.5 in)	4
	41889	4%	25.4 mm (1 in)	76.2 mm (3 in)	3

Data and information are subject to change without notice.  
Please refer to our website.



**TIP:** This product comes in several varieties. We suggest calling your sales representative for more information on this product and to place an order.

