

SOPRA-ISO PLUS PRECUT HINGED CRICKET ROOFS

SLOPE INSULATION

PROPERTIES	
Surface	Polymer-coated glass fibre facers
Underface	Polymer-coated glass fibre facers
Applications	Adhesive Adhered with hot bitumen Mechanically fastened
Service Temperature	-73 to 122 °C (-100 to 250 °F)

Data and information are subject to change without notice. Please refer to our website.

SOPREMA hinged crickets are the solution to counter the water and direct it to the drains and gutters. They reduce on-site cutting and simplify the work of contractors thanks to their simple and effective design. Factory-precut with pre-set angles, they have a standardized size—reducing manufacturing delays that can occur in the industry.


- Promotes positive flow towards the drain
- Helps save time at installation
- Is offered in standard angles adapted for the project (1:1, 2:1, 3:1)
- Is available with 2% and 4% slopes



To see the installation guide for precut articulated crickets, go to <u>soprema.ca</u>.





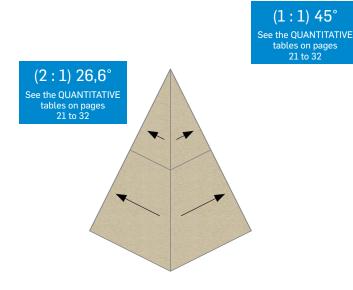

(3:1) 18,4°
See the QUANTITATIVE tables on pages 21 to 32

