

SOPRANATURE METAL EDGING

TECHNICAL DATA SHEET 181016SCANE

(supersedes -)



VEGETATIVE SOLUTION
ACCESSORIES PRODUCT

APPLICATIONS

ROOFS

PLAZA-DECKS

DESCRIPTION

The **METAL EDGING** is made of aluminium 5052-H32, 16 ga. (0.051 in), without surface treatment.



It is "L" shaped, available in several dimensions, and it is possible to have it slotted or not. The slotted **METAL EDGE** is used to promote water flow.

The **METAL EDGING** is used to delimit vegetation-free zones from the vegetative ones. It is also used to create the necessary borders around drains, projections and chimney stacks that can be found on **SOPRANATURE** green roofs, garden-roofs and plaza-decks.

INSTALLATION

Install the **METAL EDGING** on the appropriate locations directly over drainage boards by overlapping the edges on 25 mm (1 po) and fix the upper part of the edge with a compatible metal screw.

FOR COMPLETE INFORMATION ON PRODUCT INSTALLATION, PLEASE CONSULT YOUR SOPREMA REPRESENTATIVE.

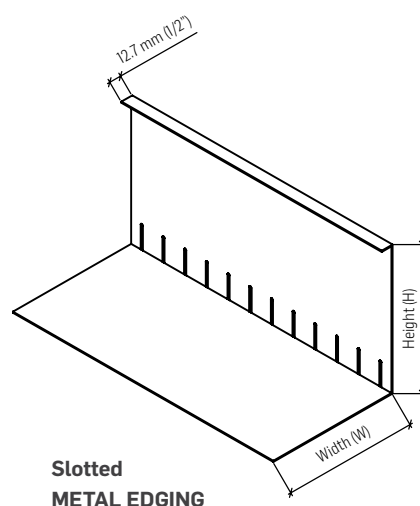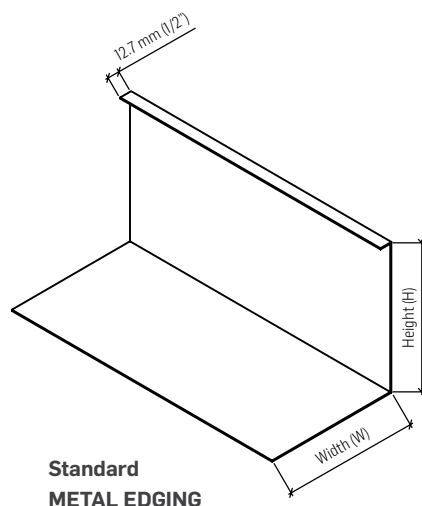

METAL EDGING TYPE	AVAILABLE DIMENSIONS mm (in)
Standard (H x W)	100 x 100 ; 125 x 125 ou 150 x 150 (4 x 4 ; 5 x 5 ou 6 x 6)
Slotted (H x W)	100 x 100 ; 125 x 125 ; 150 x 150 ou 200 x 200 (4 x 4 ; 5 x 5 ; 6 x 6 ou 8 x 8)



SOPREMA.US • 1.800.356.3521

SOPREMA.CA • 1.877.MAMMOUTH

NOTE : All products manufactured by SOPREMA Inc. comply with the description and properties indicated in the technical data sheet that was current at the date of manufacture.

TDS_SOPRANATURE_METAL_EDGING.indd