




AYR-FOIL®

HI-PERFORMANCE REFLECTIVE INSULATION

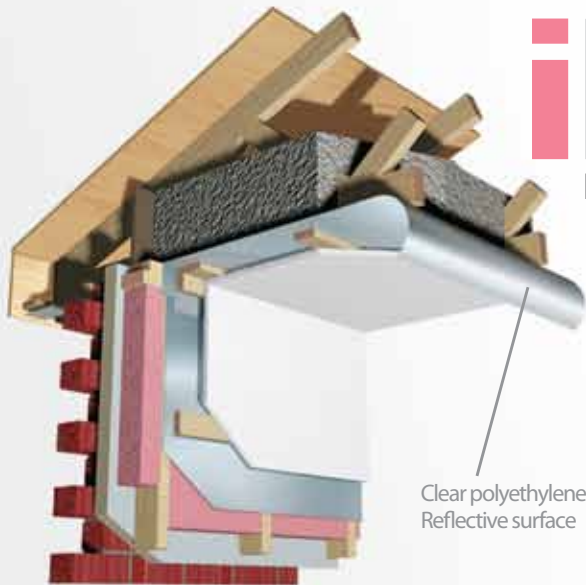

Clear polyethylene
Reflective surface

iFLEX

REFLECTIVE VAPOUR BARRIER

IMPROVED

BENEFITS

- Increases R-value up to 20%
- Cuts humidity to protect the insulation
- Keeps the house cooler in summer
- Meets requirements of CGSB Standard 51.33-M89
- **More tearing resistant and opaque**

DESCRIPTION

Reflective vapour barrier for walls and ceilings. It installs between the drywall and insulation to block humidity and protect the insulation. The insulating properties of the reflective surface make this a unique product because it increases the R-value of the existing insulation system up to 20%.

EASY INSTALLATION

1. Staple I-Flex to the studs, reflective surface facing in toward the room;
2. Seal the joints with AYR-FOIL ALUMINUM FOIL TAPE;
3. Install 1 x 3 inch wooden slats perpendicular to the studs every 400 mm (16 inches). They will create an air space between the drywall and the I-Flex, optimizing the R-value.
4. Install the drywall panels onto the wooden slats.

Customer Service
TOLL FREE : 1 877.478.8408
Phone : +1 (819) 478-8408
www.ayr-foil.com info@ayr-foil.com

ANOTHER EFFECTIVE SOLUTION BY



1.877.478.8408