


LEVELLING PATCH

FOR ASPHALT SURFACES

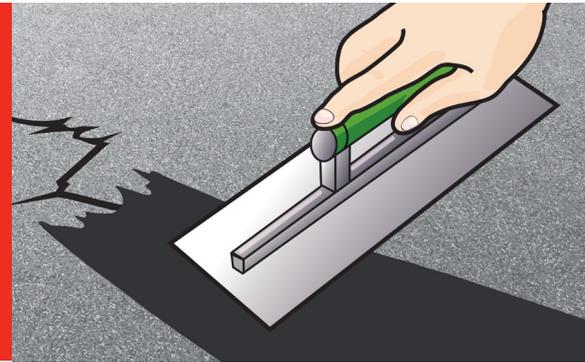

The LEVELLING PATCH is designed to repair medium cracks and joints and to level shallow depressions in asphalt surfaces. It prevents damage to asphalt surfaces caused by wear, rain and frost.

- Efficiently levels cracks, joints and slight depressions on asphalted surfaces
- Extends the service life of asphalted surfaces

PRODUCT PURPOSE

Application	Asphalt surface protection
Substrate	Asphalt

PRODUCT CHARACTERISTICS

Installation Method	Trowel applied
---------------------	----------------

PACKAGING

Code	Containers	Units per box	Boxes per skid
50007	3.62 kg	4	30
50008	13.6 kg	1	48

INSTALLATION

Storage	2 years in the original container. Store in a cool, dry place, between 10 ° C (50 ° F) and 40 ° C (104 ° F). Keep from freezing.
Minimum Application Temperature	10 ° C (50 ° F). The temperature of the surface to be treated should be at least 10 ° C (50 ° F).
Surface Preparation	The substrate must be dry and free of dust, grease or other contaminants.
Installation Prerequisite	Is used to fill medium-sized cracks from 1/4 in to 3/4 in (6 mm to 20 mm) or to level shallow holes and depressions.
Installation	<ol style="list-style-type: none"> 1. LEVELLING PATCH is ready to use. Apply with a trowel. Dip the trowel in water frequently. 2. For repairs greater than 1 in (2.5 cm) deep, mix equal parts of aggregate (clean sand and crushed stone or sand only) and LEVELLING PATCH. Add enough water to obtain about the same consistency as the original product. 3. After the repairs, level and smooth the surface with a trowel. 4. Allow the LEVELLING PATCH to dry and cure. Repeat the application if necessary.
Drying time	Let dry for at least 24 hours under ideal conditions. Drying time may vary depending on ambient temperature, humidity level and the amount applied.
Cleaning	Clean damp tools with water. When dry, clean with solvents such as mineral spirits, paint thinner or xylene.
Tricks / Tips	For largers cracks and other repairs, use ASPHALT REPAIR. Allow product to cure completely before applying a driveway sealer. To ensure long-lasting protection of the asphalt surface, seal it using a RESISTO driveway sealer.
Recommendations/ Limitations	Avoid applying the product if there is a risk of rain, high humidity or frost within 24 hours of application. Apply on asphalted pavements that are least 6 months old. Apply without dilution or thinning. Not designed to level ruts (uneven surfaces caused by automobiles weight in parking lots) or other wide surfaces.