




INSULATION

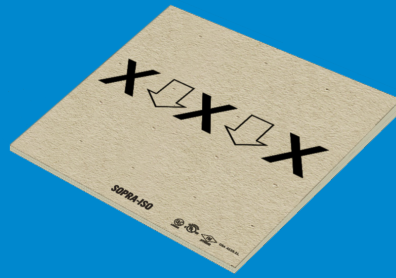

SOPRA-ISO PLUS TAPERED ROOFS

SLOPE INSULATION

PROPERTIES	
Surface	Polymer-coated glass fibre facers
Underface	Polymer-coated glass fibre facers
Technology	Polyisocyanurate
Applications	Adhesive Adhered with hot bitumen Mechanically fastened
Length	1.22 m (4 ft) 2.44 m (8 ft)* on demand
Width	1.22 m (4 ft)
Thickness	Refer to the slope panels table on page 20
Net Area	1.49 m ² (16 ft ²) to 2.97 m ² (32 ft ²)
R-value	Refer to the website: soprema.ca
Service Temperature	-73 to 122 °C (-100 to 250 °F)

SOPRA-ISO PLUS TAPERED is a sloped polyisocyanurate thermal insulation board. It is composed of a closed-cell polyisocyanurate foam core between polymer-coated glass fibre facers. SOPRA-ISO PLUS TAPERED is designed to promote positive drainage and used as thermal insulation for SOPREMA roofing systems.

- Average thermal resistance per inch higher than any other type of insulation (R-VALUE OF 5.7 PER INCH)
- Higher dimensional stability due to the polymer-coated glass fibre facers
- Mould resistance

TESTS, STANDARDS AND APPROVALS

TESTED
ACCORDING TO
CSA A123.21
STANDARD



Data and information are subject to change without notice. Please refer to our website.



TIP: This product comes in several varieties. We suggest calling your sales representative for more information on this product and to place an order.

