


SOPRA-ISO SUMP ROOFS



INSULATION

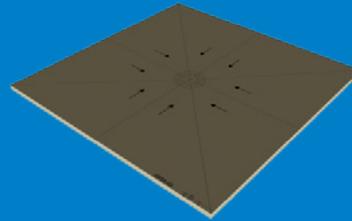

SLOPE INSULATION

Considered by industry professionals as an essential component for insulated conventional roofs, the 4 ft x 4 ft sump helps ensure that the drain is at the actual lowest point. Easy to install in one step, it contributes to positive drainage around drains. Whether the decking is flat or with an integrated structural slope, the sump is essential for all your projects and helps ensure the longevity of the roof.

- Ensures that water flows efficiently towards the drain
- Reduces installation time
- Adapted to drains of different diameters

PROPERTIES	
Surface	Organic facers reinforced with glass fibres
Underface	Organic facers reinforced with glass fibres
Technology	Polyisocyanurate
Applications	Adhesive Adhered with hot bitumen Mechanically fastened
Width	1.22 m (4.0 ft)
Length	1.22 m (4.0 ft)
Service temperature	- 73 to 122 °C (-100 to 250 °F)

A-102

PRODUCT	CODE	SLOPE	THICKNESS (MIN.)	THICKNESS (MAX.)	UNITS PER SKID
SOPRA-ISO SUMP	48001	2%	12.7 mm (0.5 in)	25.4 mm (1.0 in)	42
	41187	2%	25.4 mm (1.0 in)	38.1 mm (1.5 in)	30
	41328	2%	38.1 mm (1.5 in)	50.8 mm (2.0 in)	22
	41220	2%	50.8 mm (2.0 in)	63.5 mm (2.5 in)	18
	47004	2%	63.5 mm (2.5 in)	76.2 mm (3.0 in)	14
	48047	4%	12.7 mm (0.5 in)	38.1 mm (1.5 in)	30
	48042	4%	25.4 mm (1.0 in)	50.8 mm (2.0 in)	22
	48043	4%	38.1 mm (1.5 in)	63.5 mm (2.5 in)	18
	48044	4%	50.8 mm (2.0 in)	76.2 mm (3.0 in)	14

Data and information are subject to change without notice.
Please refer to our website.



TIP: This product comes in several possibilities. We suggest to call your sales representative for more information on this product and to place an order.