




INSULATION

SOPRA-ISO PLUS PRECUT CRICKET FOR MECHANICAL UNIT ROOFS

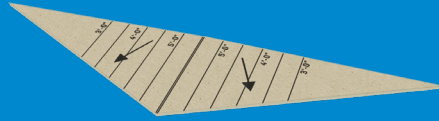

SLOPE INSULATION

PROPERTIES	
Surface	Polymer-coated glass fibre facers
Underface	Polymer-coated glass fibre facers
Applications	Adhesive Adhered with hot bitumen Mechanically fastened
Service Temperature	-73 to 122 °C (-100 to 250 °F)

Mechanical units, roof hatches or other roof openings are obstacles to the water flow. SOPREMA's unit cricket promotes efficient drainage by guiding the water around these obstacles. This unique and innovative product has cutting lines printed on the panel to indicate where to cut depending on the length of the unit.

- Promotes positive flow
- Helps save time at installation
- Includes cutting lines printed on the panel to facilitate cutting during installation
- Is available with 4% slope for units of 7 ft and less, with an option for units from 7 ft to 14 ft

PRODUCT	CODE	SLOPE	THICKNESS (MIN.)	THICKNESS (MAX.)	UNITS PER SKID
SOPRA-ISO PLUS PRECUT CRICKET FOR MECHANICAL UNIT (0' - 7')	47021	4%	0 mm (0 in)	25.4 mm (1 in)	50
SOPRA-ISO PLUS PRECUT CRICKET FOR MECHANICAL UNIT (7' - 14')	47024	4%	0 mm (0 in)	50.8 mm (2 in)	18

Data and information are subject to change without notice. Please refer to our website.



TIP: This product comes in several varieties. We suggest calling your sales representative for more information on this product and to place an order.



Watch the promotional video
www.soprema.ca



More info online
www.soprema.ca