


NON FIBROUS COATING

COATING

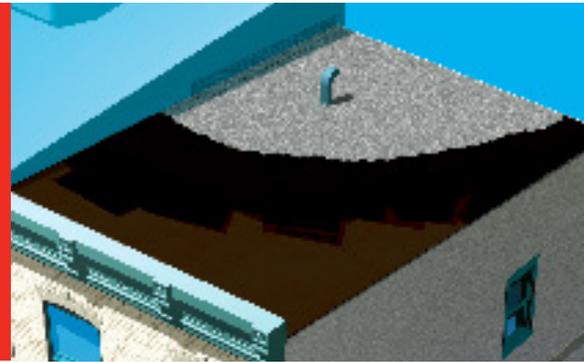

Coating for built-up roofs, composed of bitumen and fast evaporating solvent. It is completely waterproof and works with various roof elements (chimneys, metal flashing, etc.).

- Extends the useful life of built-up roofs
- Adheres to many types of materials without primer
- Dries quickly

PRODUCT PURPOSE

Application	Waterproofing
Building Part	Roofing
Types of Slope	Very low slope
Substrate	Asphalt roof

PRODUCT CHARACTERISTICS

Installation Method	Brush	Roller
Operating Temperature	-40 °C to 80 °C (-40 °F to 176 °F)	

PACKAGING

Code	Containers	Indicative Covering	Quantity per Pallet
53020	3.78 l (1 US gal)	0.5 to 0.7 l/m ² (0.1 to 0.2 US gal / 10 ft ²)	120
53021	18.9 l (5 US gal)		36

PROPERTIES

Properties	NON FIBROUS COATING
Color	Black
Specific gravity at 20 °C (68 °F)	0.98 kg/L (8.2 lbs/gal US)
Solids by weight	77%

(Valeurs nominales)

NON FIBROUS COATING

INSTALLATION

Storage	24 months in its original closed packaging, in a cool, well-ventilated area. Store in a cool, dry place up to 40 °C (104 °F). The product can withstand freezing.	
Minimum Application Temperature	10 °C (50 °F)	
Complementary products	PLASTIC CEMENT	BLACK ELASTOMERIC SEALANT
Required Products	 Brush	 Roller
	 Sprayer	
Surface Preparation	The substrate must be clean, dry and free of dust, grease or other contaminants.	
Installation	<ol style="list-style-type: none"> 1. Repair holes and cracks with plastic cement or an elastomer sealant before applying the coating. 2. Pour the product on the roof and spread evenly using a brush, scraper or roller. 3. When the coating is dry, cover with gravel to protect the surface from UV rays. 	
Drying time	Between 12 and 24 hours, depending on ambient temperature and the applied amount.	
Cleaning	Clean tools with petroleum solvents (mineral spirits, xylene, etc.).	
Tricks / Tips	The protection offered by the NON FIBROUS COATING will have an optimal duration if protected from UV rays, for example using gravel.	
Recommendations/ Limitations	Use is not recommended on elastomer bitumen membranes, asphalt shingles, coal tar pitch and metal roofs. It is not recommended to use a product containing bitumen directly on softwood boards or on flexible polyvinyl chloride.	
Warnings	Keep out of the reach of children. Properly close the container after each use. During use, keep away from ignition sources. No smoking. After application, keep away from flames until solvent has evaporated. Do not pour residues in drains.	