


## SA CAP FR GR

### CAP SHEET MEMBRANE

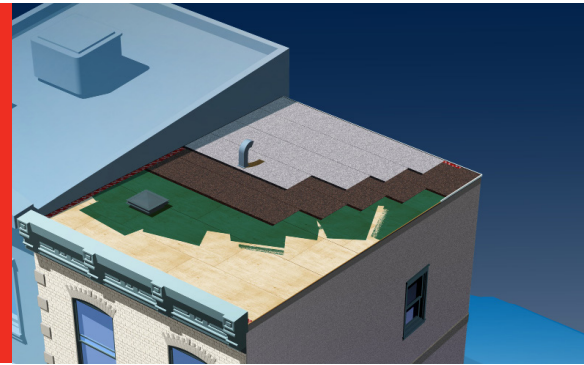

Self-adhesive granulated cap sheet used in waterproofing systems of one-ply, two-ply or three-ply roofs.

- When the membrane is bonded directly to plywood and used in combination with SA BASE, it is a unique self-adhesive system, UL 790, Class A classified\*
- Excellent resistance to temperature variations
- Retains its flexibility at low temperatures









#### PRODUCT PURPOSE

Application	Waterproofing	
Building Part	Roofing	
Types of slope	Low slope	Very low slope
Substrates	Plywood	OSB
	Cement	Asphaltic panel

#### PRODUCT CHARACTERISTICS

Technology	SBS modified bitumen
Surface	Granules
Underface	Two parts silicone release film (split-back)
Reinforcement	Composite
Installation Method	Self-adhesive
Operating temperatures	-40 °C to 90 °C (-40 °F to 194 °F)

#### CONDITIONING

Code	Color	Width		Length		Thickness		Net Area		Brute Area		Quantity (per pallet)
		m	in	m	ft	mm	mil	m <sup>2</sup>	ft <sup>2</sup>	m <sup>2</sup>	ft <sup>2</sup>	
09220	 Brown	1	39	10	33	3.6	141	9.2	99	10	107	16
09221	 Grey											
09222	 Black											
09223	 Green											
09224	 White											
09225	 Weatherwood											
09226	 Tan											
09227	 Terracota											

#### PROPERTIES





Properties	STANDARDS	SA CAP FR GR
Tensile strength, MD/XD (23 °C)	ASTM D5147	15 / 14 kN/m (85 / 80 lbf/in)
Elongation at peak load, MD/XD (23 °C)	ASTM D5147	6 / 6%
Tear resistance, MD/XD	ASTM D5147	750 / 700 N (169 / 157 lbf)
Cold bending	ASTM D5147	< -18 °C (0 °F)

(All values are nominal)

\* See UL listing for details about the class A rating

## SA CAP GR

### INSTALLATION

Storage	Rolls should be stored upright, tape side up. If the products are stored outdoors, cover them with an opaque protective cover after removing the delivery packaging. Can withstand frost, but must be reactivated for 24 hours to at least 10 ° C (50 ° F) prior to installation.	
Minimum Application Temperature	10 ° C (50 ° F)	
Complementary Products	EXTERIOR PRIMER	<b>OR</b> H <sub>2</sub> O PRIMER
	RESISTOFLASH COATING	RESISTOFLASH REINFORCEMENT
		RESISTOFLASH GRANULES
Tools Required	 Knife	 Tape measure
	 Smoothing roller	 RESISTO ELASTOMERIC SEALANT
Surface Preparation	The substrate must be clean, dry and free of dust, grease or other contaminants.	
Installation Prerequisite	On a cement or sanded membrane substrate, such as SA BASE, it is necessary to apply EXTERIOR PRIMER, or equivalent before installing the membrane SA CAP FR GR. H <sub>2</sub> O PRIMER can only be use over plywood, OSB, cement or asphaltic panel. Do not use H <sub>2</sub> O PRIMER between two membranes. Allow the primer to dry completely before applying the membrane	
Installation	<ol style="list-style-type: none"> <li>1. If conditions require, prepare the substrate with EXTERIOR PRIMER or H<sub>2</sub>O PRIMER.</li> <li>2. Position the membrane parallel to the lower edge of the roof.</li> <li>3. Fold the sheet on itself, by half of its width, or 50 cm (20 in) over the whole length already positioned. It is recommended to kneel on the unfolded portion of the membrane to keep it in place during this operation.</li> <li>4. Remove the protective film from the folded section, while placing the membrane on the support. The pressure-sensitive portion will adhere to the support.</li> <li>5. Then take the other side of the membrane and repeat the previous two steps.</li> <li>6. Immediately apply pressure on the membrane using a heavy metal roller or hard rubber roller to ensure adhesion between the support and the membrane and avoid forming bulges, folds or gaps.</li> <li>7. Using the ungranulated side of the membrane ensure a good overlap of about 10 cm (4 in) from each edge. The overlap must be positioned on the upper side of the slope.</li> </ol> <p>Note: The cross overlaps must be sealed with the ELASTOMERIC SEALANT applied using a trowel on the non-granulated side of the membrane, 15 cm (6 in). Refer to ROOF SYSTEM INSTALLATION for waterproofing membrane installation to roof details and upstands.</p>	
Recommendations/ Limitations	It is not recommended to use a product containing bitumen directly on softwood boards or flexible polyvinyl chloride.	

