

POLYFLEECE



ACCESSORY
PRODUCTS

APPLICATIONS

ROOFS

FOUNDATIONS

TECHNICAL DATA SHEET

ANZ-TDS-84-POLYFLEECE

DESCRIPTION

POLYFLEECE is a non-woven polyester reinforcement used with ALSAN FLASHING products.

FIELD OF APPLICATION

POLYFLEECE is applied in combination with ALSAN FLASHING products in;

- General roofing
- Green roofs
- Planter boxes
- Foundations

APPLICATION

- POLYFLEECE is installed between the first and second coat of ALSAN FLASHING products.
- For the realisation of the penetration a second fleece of POLYFLEECE will be installed between the second and third coat of ALSAN FLASHING product at the base of the penetration.

FOR COMPLETE INFORMATION ON PRODUCT INSTALLATION, PLEASE CONSULT YOUR SOPREMA REPRESENTATIVE.

PACKAGING

SPECIFICATIONS	POLYFLEECE
Width	150 mm
Thickness	0.9 mm
Lenght	30.5 m

PROPERTIES

PROPERTIES	STANDARDS	POLYFLEECE
Reinforcement type	-	Non-woven polyester
Weight	ASTM D3776	55 g/m ²
Tensile strength MD CD	ASTM D5035	32.4 kN/m 17.5 kN/m
Elongation MD CD	ASTM D5035	10 % 75 %



SOPREMA.COM.AU • +61 (3) 9221 6230

TDS_POLYFLEECE_2021_RA

1/2



ACCESSORY
PRODUCTS

APPLICATIONS

ROOFS


FOUNDATIONS

POLYFLEECE

TECHNICAL DATA SHEET

ANZ-TDS-84-POLYFLEECE

VISUAL

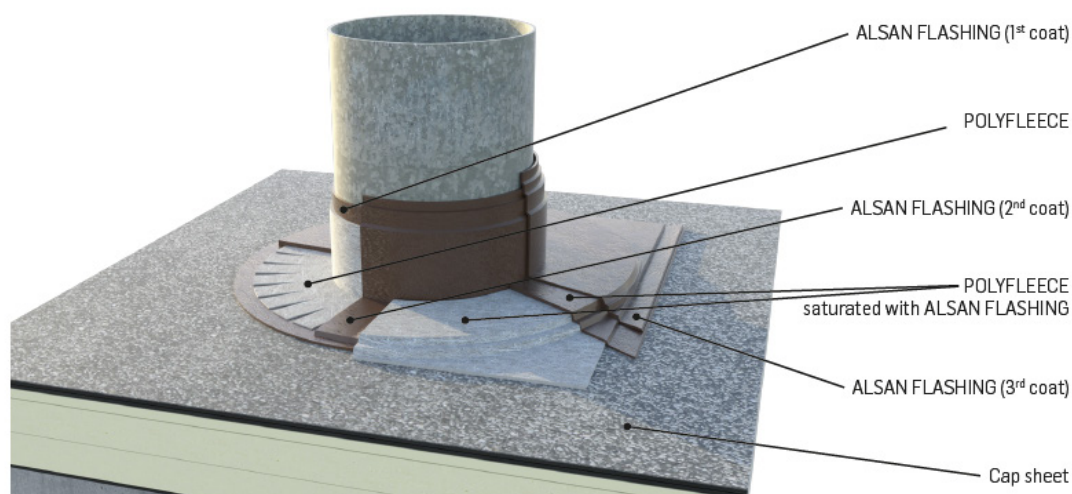

STORAGE AND HANDLING

Always store POLYFLEECE rolls in dry location where there is no risk of deformation and creasing fabric.

STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this publication is based on the present state of our best knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by Commonwealth or State Legislation. The owner, their representative and/or the contractor are responsible for checking the suitability of products for their intended use.



SOPREMA.COM.AU • +61 (3) 9221 6230

2/2

TDS_POLYFLEECE_2021_RA