

# ALSAN<sup>®</sup> FLASHING



WATERPROOFING

APPLICATIONS

ROOFS

FOUNDATIONS


WALLS

## BITUMEN AND POLYURETHANE-BASED WATERPROOFING COATINGS

ALSAN FLASHING is a patented single-component, polyurethane- and bitumen-based waterproofing coating used to waterproof hard-to-access upstands and other details where it is difficult to apply sheet waterproofing membranes. The product is liquid-applied, resistant to punctures and UV rays, and it is used in combination with our POLYFLEECE.

### BENEFITS

- Provides superior protection against moisture
- Is easy to apply, which reduces the cost of labour
- Adapts to any irregular shape
- Eliminates fire hazards because no torch is used, bringing peace of mind to customers, neighbours and tenants

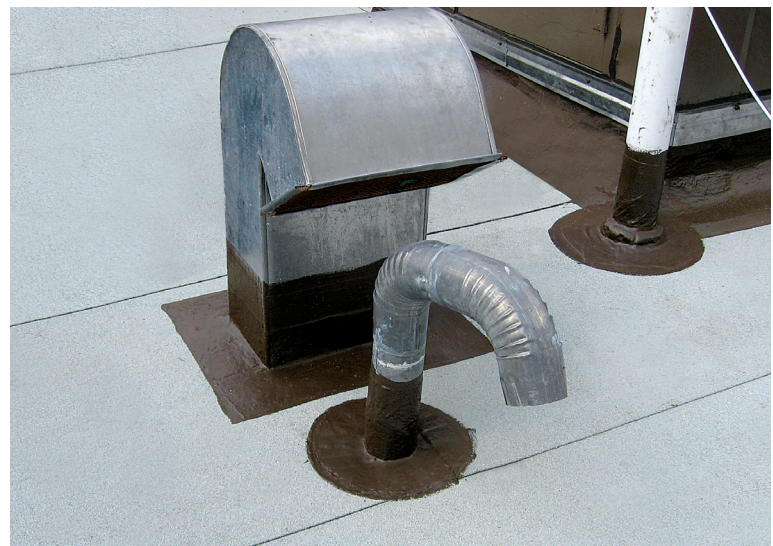


Likewise, our ALSAN FLASHING WINTER offers the same performance as the standard version, but at a low-temperature application (down to -10 °C [14 °F] without conditioning). Two component, it is available in two parts in a box for a total volume of 3.37 L.



## TECHNICAL CHARACTERISTICS

	ALSAN FLASHING	ALSAN FLASHING WINTER
Single component	Yes	No (Part A + Part B in a box)
Application temperature	5 °C and above (41 °F and above)	-10 °C to 5 °C (14 °F to 41 °F)
Sizes available	3.78 L (1 US gal) 18.93 L (5 US gal)	3.37 L (0.89 US gal)
Coverage rate	1.2 m <sup>2</sup> /L (50 ft <sup>2</sup> /US gallon)	1.2 m <sup>2</sup> /L (50 ft <sup>2</sup> /US gallon)

## ALSAN FLASHING WATERPROOFING SYSTEM

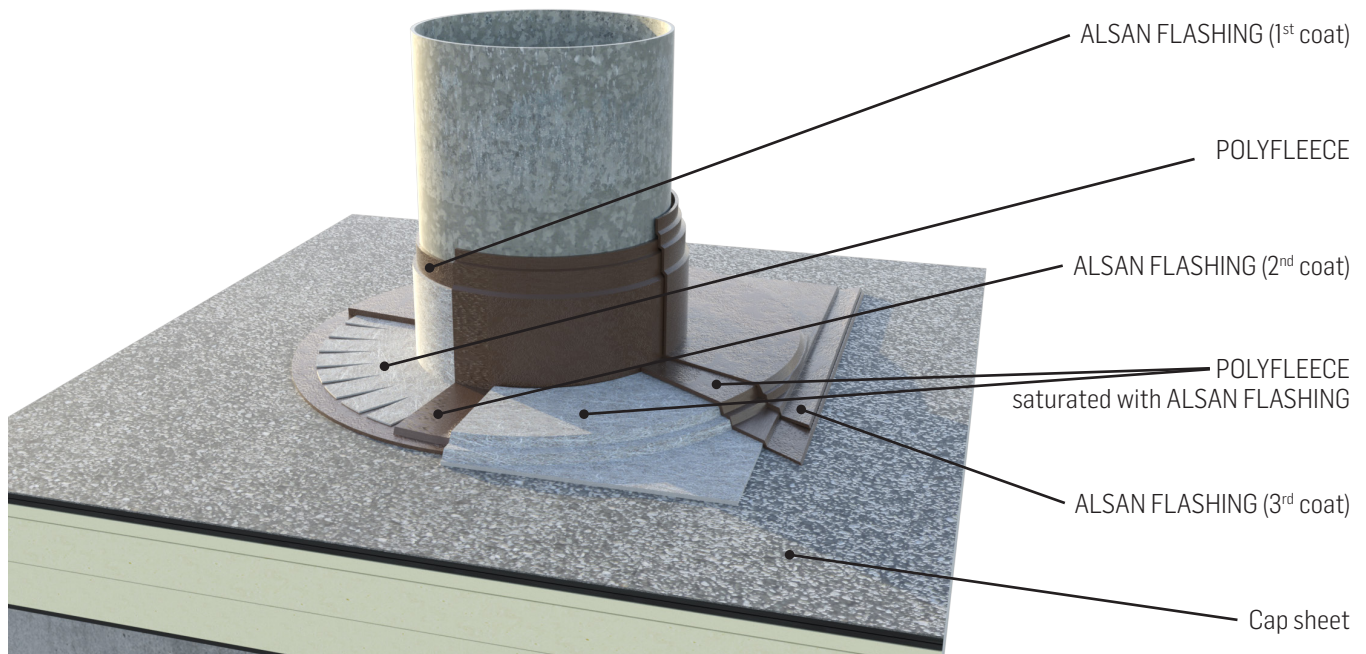

## AVAILABLE FINISHES

For aesthetic reasons, the surface can be covered with mineral granules or with the SOPRALASTIC 124 ALU sealant for an aluminum-coloured finish.



For further information, please contact your SOPREMA representative.

