

DEBOTACK 2.5 T/F C175



WATERPROOFING

APPLICATIONS

ROOFS



TECHNICAL DATA SHEET

ANZ-TDS-04-DEBOTACK 2.5 T/F C175

DESCRIPTION

DEBOTACK 2.5 T/F C175 is a flexible self-adhesive waterproofing membrane consisting of a mixture of penetration bitumen, improved with SBS (Styrene-Butadiene-Styrene). It is reinforced with a composite fleece of 175 g/m² polyester and glass.

DEBOTACK 2.5 T/F C175 upper side is finished with a mixture of talcum and sand, and the underside is covered with a removable siliconised film.

FIELD OF APPLICATION

DEBOTACK 2.5 T/F C175 can be used as a vapor-repellent layer for concrete, steel or wooden surfaces. It can also be used as a base sheet layer in a multi-layer system.

APPLICATION METHOD

DEBOTACK 2.5 T/F C175 is a self-adhered membrane (including side-laps) installed over a prepared substrate using ELASTOCOL 600. The end-laps are heat welded using a leister or a hot air gun.

INSTALLATION PROCEDURE

SUBSTRATE

- No work should be started until all surfaces are smooth, dry and free of ice, snow or any other substance that may prevent the membrane from adhering properly.
- Substrate must have a minimum 1% gradient to ensure that water drains to drainage outlets.
- Concrete substrate must be fully cured before application of the membrane.
- Concrete substrate must have a Concrete Surface Profile (CSP) between 3 and 5 as per International Concrete Repair Institute.
- Adhesion test is recommended prior to installation of membrane.
- Commencement of installation shall be taken as acceptance of the substrate by the Applicator.

PRIMING

- When installed over concrete, wooden-based substrates or metal surface, prime with ELASTOCOL 600 at the rate specified in the TDS.

INSTALLATION

- Unroll DEBOTACK 2.5 T/F C175 onto the substrate.
- Starting at the low point of the roof, lay out the membrane to ensure the plies are installed perpendicular to the roof slope, shingled to prevent back-water laps. Ensure specified minimum 80 mm side-laps overlap and minimum 150mm end-laps overlap are maintained. End-laps should be staggered 1 m apart.
- As the DEBOTACK 2.5 T/F C175 is unrolled, apply pressure on the topside of the ply to optimise the self-adhesive property automatically activated, and to get a full adhesion of the underface membrane to the substrate. The full bond strength is achieved after the application of an additional thermal activation (e.g. welding upper layer).
- Adjust application methods to accommodate varying environmental conditions as necessary to achieve the desired results.
- At the 150 mm end-laps ensure a fully adhered watertight seal. Melt the DEBOTACK 2.5 T/F C175 using a torch or hot-air welder.
- In order to obtain a good adhesion, the membrane has to be placed at a temperature above +10 °C. Before installing, the rolls must be stored for at least 12 hours at a temperature above +10 °C.
- All penetrations and upturn details should be waterproofed as per SOPREMA Installation Guides and detail drawings.


FOR COMPLETE INFORMATION ON PRODUCT INSTALLATION, PLEASE CONSULT YOUR DuO REPRESENTATIVE.

Compliance with AS 4654.1

Easy to install

High mechanical properties

High adhesion properties

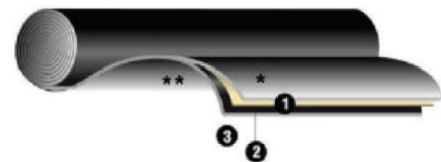

**mixture of talcum and sand

1 Upper coating: SBS-elastomer modified bitumen

2 Composite reinforcement (175 g/m²) of polyester and glass fibre

3 Uncercoating: self-adhesion bitumen

**removable siliconised film



SOPREMA.COM.AU • +61 (3) 9221 6230

DEBOTACK

2.5 T/F C175



WATERPROOFING

APPLICATIONS

ROOFS

TECHNICAL DATA SHEET

ANZ-TDS-04-DEBOTACK 2.5 T/F C175

PACKAGING

SPECIFICATIONS	DEBOTACK 2.5 T/F C175
Thickness	2.5 mm
Roll dimensions	10 m × 1 m
Roll weight	27 kg
Rolls per pallet	30

(All values are nominal)

PROPERTIES

PROPERTY	TEST METHOD	DEBOTACK 2.5 T/F C175
Visual defects	EN 1850-1	PASS
Straightness	EN 1848-1	PASS
External fire performance in accordance with EN 13501-5	CEN/TS 1187	NA
Reaction to fire in accordance with EN 13501-1	EN 13501-1	F
Tensile strength (L/T)	AS 4654.1	800 / 950 N/5 cm (±100)
Elongation at break (L/T)	AS 4654.1	MD: 43 (±8) % CD: 44 (±10) %
Abrasion resistance	AS 1580.403.2	-
Bond strength	ASTM C794	17 ± 6 N/2.5cm Type of failure : 70% cohesive in the bitumen mass 30% cohesive in the primer
Dimensional stability	ASTM D6207	MD: 0,07% CD: 0,32%
Cyclic movement	CSIRO Moving Joint Test (see Appendix B)	Pass (22°C / 26% RH)
Field seam strength	ASTM D1876	1.375 (±0.15) N/m
Heat ageing	AS 4654.1 (AS 1145.3)	Pass / No change
Ultraviolet resistance	AS 4654.1 (AS 1145.3) (ASTM D4799)	Pass / No change
Durability	AS 4654.1	Pass
Water vapour transmission rate	ASTM E96	0*

* The results values are below the tolerance of the equipment.



SOPREMA.COM.AU • +61 (3) 9221 6230

TDS_DEBOTACK_2.5_T/F_C175_12-2021

2/3

DEBOTACK

2.5 T/F C175



WATERPROOFING

APPLICATIONS

ROOFS

TECHNICAL DATA SHEET

ANZ-TDS-04-DEBOTACK 2.5 T/F C175

STORAGE AND HANDLING

Rolls must be stored upright. If stored outdoors, cover them with an opaque protection cover after removal of the delivery packaging. Pallets may not be placed onto each other during storage and rolls need to be stacked to avoid bending. Temperatures above +30 °C should be avoided at all times.

STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this publication is based on the present state of our best knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by Commonwealth or State Legislation. The owner, their representative or the contractor are responsible for checking the suitability of products for their intended use.

Note: Field service where provided, does not constitute supervisory responsibility. Suggestions made by Soprema Australia Pty Ltd either verbally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they are responsible for carrying out procedures appropriate to a specific application.

TDS_DEBOTACK_2.5_T/F_C175_12-2021



SOPREMA.COM.AU • +61 (3) 9221 6230

3/3