


FOUNDATION COATING – LOW TEMPERATURE

COATING

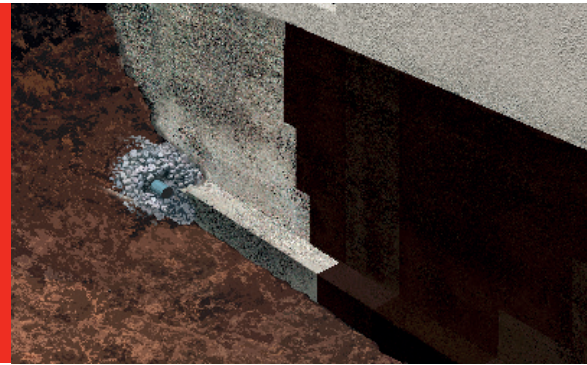

A coating composed of bitumen and fast evaporating solvent specifically formulated to be applied in cold weather. It is used for the damp proofing of foundation walls, footings, retaining walls, wing walls, abutments and culverts.

- Easy Installation
- Installation in cold weather

PRODUCT PURPOSE

Application	Dampproofing	
Building Part	Foundations	
Substrates	Concrete	Masonry block

PRODUCT CHARACTERISTICS

Installation Method	Paint brush	Roller
	Sprayer	
Operating Temperature	Up to 70 °C (158 °F)	

PACKAGING

Code	Container	Indicative covering	Quantity per pallet
53063	18.9 l (5 US gal)	0.5 to 0.7 l/m ² (1.2 to 1.7 gal/100 ft ²)	36

PROPERTIES




Properties	FOUNDATION COATING - LOW TEMPERATURE
Color	Black
Specific gravity at 20 °C (68 °F)	1 kg/L (8.3 lbs/gal US)
Solids by weight	70%
Brookfield Viscosity at 25 °C	1000 cP
Water vapour permeance according to ASTM E96 Method A	< 43 ng/Pa•s•m ² (0.74 perm)

All values are nominal
Meets CGSB 37-GP-6MA

FOUNDATION COATING - LOW TEMPERATURE

RESISTO

INSTALLATION

Storage	Up-to 24 months in its original closed packaging, in a cool, well-ventilated area.		
Maximum Application Temperature	35 °C (95 °F)		
Complementary products	PLASTIC CEMENT	OR SUPER PLASTIC CEMENT	
	OR SUPREME PLASTIC CEMENT		
Tools Required	 Paint brush		Roller
	 Sprayer		
Surface Preparation	The concrete must be clean, dry and free of dust, grease or other contaminants.		
Installation Prerequisite	It is recommended to seal the form ties with a plastic cement before applying FOUNDATION COATING - LOW TEMPERATURE.		
Installation	Mix the product thoroughly until homogeneous consistency. Apply with a roller, a brush or sprayer to achieve a continuous film. In winter conditions, product conditioning may be necessary.		
Drying time	12 to 36 hours depending on temperature and quantity applied.		
Cleaning	Clean tools with petroleum solvents (mineral spirits, xylene, etc.).		
Tricks / Tips	Ensure that FOUNDATION COATING is dry to the touch before allowing backfilling.		
Recommendations/ Limitations	Exterior use only. It is not recommended to use a product containing bitumen directly on softwood boards or on flexible polyvinyl chloride. Protect product from water until completely dry. Do not apply to excessively humid or frosted surfaces.		
Warnings	Keep out of the reach of children. Properly close the container after each use. Keep out of the sun and away from ignition sources. During use, keep away from ignition sources. No smoking. After application, keep away from flames until solvent has evaporated. Harmful if swallowed, inhaled, or contacts the skin. Do not pour residues in drains.		

