

# SOPRACANT® MB

## MODIFIED BITUMEN CANT STRIP

SOPRACANT MB  
PRODUCT# SMALL 56197  
LARGE 56196

### PRODUCT DATA SHEET

#### DESCRIPTION & FEATURES


SOPRACANT MB cant strips are triangular shaped, modified bitumen cant strips designed to enhance the transition from horizontal to vertical surfaces in modified bitumen roof assemblies. The unique composition of SOPRACANT MB cant strips is ideal for direct heat-welding application (unlike cant strips composed of foam insulation, perlite, wood fiber, or wood that require an additional separator layer), and they are also compatible with cold adhesive and hot asphalt applications.

#### STORAGE & HANDLING

SOPRACANT MB cant strips are designed to resist damage from typical storage and handling. They are also resistant to exposure to various weather conditions and moisture, however it is recommended to follow good roofing practice and store in a clean, dry location prior to installation. SOPRACANT MB cant strips are packaged in cardboard boxes.

#### ADVANTAGES

- Strong, dimensionally stable cant strip that resists damage and breakage on the jobsite
- Available in two sizes: Small for low flashing heights and Large for standard flashing heights
- Compatible with a variety of roofing systems and roof decks
- Provides a superior bonding surface compared to other cants strip options
- Enhances roof drainage at horizontal to vertical transitions
- Designed with application versatility in mind, can be installed by heat-welding, mechanically fastening or adhered in COLPLY™ Adhesive or SBS Elastic Cement\*

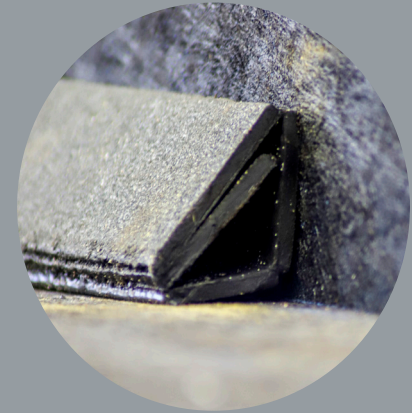

Small Application Shown

#### QUICK FACTS

PRODUCT	DIMENSIONS (in)	LENGTH (in)	WEIGHT (lb)	PIECES / BOX (box weight)	COVERAGE / BOX (LINEAR FT)	BOX / PALLET (pallet weight)
SMALL	1 1/4" x 1 1/4" x 2" (3.2 x 3.2 x 5 cm)	39.4 (1.0 m)	2 (0.9 kg)	24 (48 lb)	78.7 (24.0 M)	30 (1490 LB)
LARGE	2 1/4" x 2 1/4" x 3 1/4" (5.7 x 5.7 x 8.3 cm)	39.4 (1.0 m)	4 (1.8 kg)	12 (48 lb)	39.3 (12.0 M)	30 (1490 LB)

\*Do not use with SOPREMA self adhered membranes or adhere in COLPLY EF™ Adhesive



**SOPREMA®**

[www.soprema.us](http://www.soprema.us)  
310 Quadral Drive, Wadsworth, Ohio 44281  
Toll Free: (800) 356-3521 | Tel: (330) 334-0066

PD10393 - REV. 001921